



HOBO® UX120 Plug Load Logger

Measures power and energy consumption of 120V office equipment plug loads

Onset's HOBOb Plug Load Logger is a high-accuracy, easy-to-deploy data logger that measures and records the power and energy consumption of 120V plug loads from office equipment, vending machines, and other devices.

The logger provides 0.5% measurement accuracy with a measurement resolution of 1 watt, making it an ideal choice for building audits where detailed energy use data is required. The rugged housing is designed to withstand the rigors of real-world handling, providing reliable performance despite bumps, drops, and use under desks.

Supported Measurements: AC Current, AC Voltage, Amps, Kilowatt Hours, Power Factor, Volt-Amps, Volts, Watt Hours, Watts

Key Advantages:

- 0.5% measurement accuracy enables more reliable plug load energy use data
- "Meter Mode" provides instant viewing of real-time plug load variables
- Large memory enables faster logging intervals for more comprehensive plug load profiles
- Battery back-up ensures logged data remains intact in the event of a power outage or load failure
- Full-featured LCD display provides visual diagnostics for easy deployment
- Factory calibrated (see user's manual for details)

Minimum System Requirements:



Software



USB cable*



► For complete information and accessories, please visit: www.onsetcomp.com

Part number	UX120-018
RMS Voltage Accuracy, RMS Current Accuracy, Active Power Accuracy, Power Factor Accuracy	0.5% up to 14 Amp continuous; up to 1.0% over 14 Amp when equipment being monitored is at 100% duty cycle
Power Factor Accuracy	±0.02
Drift	Up to 0.5% typical within 1 year
Memory	4 MB (1.4 million measurements, maximum)
Logging rate	1 second to 18 hours, 12 minutes, 15 seconds
Sampling rate	60 Hz or 16.67 mS single-cycle
Battery life	2 years with line power; 6 months battery only (no line power) with logging rate of 1 minute or greater operating at 25°C (77°F)
Power source	Line-powered with 0.92 m (3 ft) AC power cord or two AAA 1.5 V alkaline batteries, user replaceable
Resolution	1 Watt Load at 120 V AC 15 Amp
Operating temperature range	Logging: 5° to 40°C (41° to 104°F); 0 to 95% RH (non-condensing)
Dimensions	13.97 x 7.62 x 4.75 cm (5.5 x 3 x 1.87 in.)
CE Compliant	Yes

*USB cable included with software


HOBO UX120 4-Channel Analog Logger

Flexible, Accurate, 4-channel Analog Logger

The HOBO UX120-006M Analog Logger is a high-performance, LCD display data logger for building performance monitoring applications.

As Onset's highest-accuracy data logger, it provides twice the accuracy of previous models, a deployment-friendly LCD, and flexible support up to four external sensors for measuring temperature, current, CO₂, voltage, and more.

Supported Measurements: Temperature, 4-20mA, AC Current, AC Voltage, Air Velocity, Carbon Dioxide, Compressed Air Flow, DC Current, DC Voltage, Gauge Pressure, Kilowatts, Volatile Organic Compound

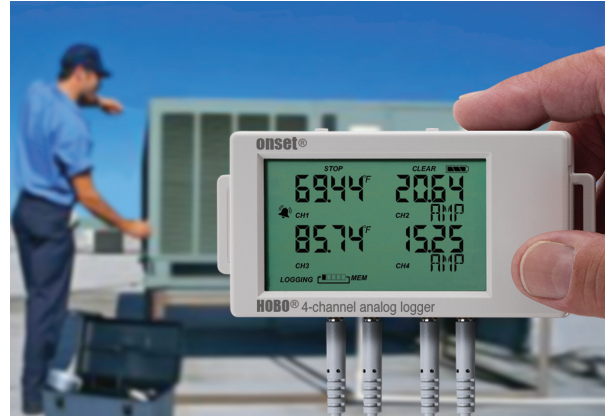

Key Advantages:

- Twice the accuracy over previous models
- 16-bit resolution
- Flexible support for a wide range of external sensors
- LCD confirms logger operation and displays near real-time measurement data
- Provides minimum, maximum, average, and standard deviation logging options
- On-screen alarms notify you when a sensor reading exceeds set thresholds
- Stores 1.9 million measurements for longer deployments between offloads

Minimum System Requirements:



Software



USB cable*

► For complete information and accessories, please visit: www.onsetcomp.com

Part number	UX120-006M
Memory	1.9 Million
Logging Rate	1 second to 18 hours, user selectable
Logging Modes	Normal, Burst, Statistics
Memory Modes	Wrap when full or stop when full
Time Accuracy	±1 minute per month at 25°C (77°F)
Battery Life	1 year typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user replaceable, 2 AAA
Dimensions	10.8 x 5.41 x 2.54 cm (4.25 x 2.13 x 1 in.)
Operating Range	Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing)
Accuracy	±0.1 mV ±0.1% of reading
CE Compliant	Yes

*USB cable included with software part # BHW-PRO-CD

HOBO UX120 4-Channel Thermocouple Logger

Log type J, K, T, E, R, S, B, or N thermocouples

The HOBO UX120 Thermocouple Logger is a four-channel LCD data logger for measuring and recording temperature in a range of monitoring applications. The logger makes it easy and convenient to record temperatures over a broad range (-260 to 1820° C) and can accept up to four J, K, T, E, R, S, B, or N type probes.

In addition to accepting four thermocouple probes, the logger features an internal temperature sensor for logging ambient temperatures, further extending the application possibilities.



Supported Measurements: Temperature

Key Advantages:

- Easy-to-view LCD display confirms logger operation and battery status
- Near real-time readout of current temperatures as well as minimum, maximum, average, and standard deviation statistics
- On-screen alarms notify you if temperatures exceed high or low thresholds
- Large memory capacity capable of storing 1.6 million measurements
- Start, stop, and restart push buttons
- User-upgradeable firmware

Minimum System Requirements:



Software



USB cable*

► For complete information and accessories, please visit: www.onsetcomp.com

Part number	UX120-014M		
Internal Temperature			
Range	-20° to 70°C (-4° to 158°F)		
Accuracy	±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F)		
Resolution	0.024°C at 25°C (0.04°F at 77°F)		
Drift	<0.1°C (0.18°F) per year		
Logger			
Logging Rate	1 second to 18 hours		
Logging Modes	Normal, Burst, Statistics		
Memory Modes	Wrap when full or stop when full		
Time Accuracy	±1 minute per month at 25°C (77°F)		
Battery Life	1 year typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user replaceable, 2 AAA		
Dimensions	10.8 x 5.41 x 2.54 cm (4.25 x 2.13 x 1 in.)		
Operating Range	Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing)		
CE Compliant	Yes		
Thermocouple (probes sold separately)	Range	Accuracy	Resolution
Type J	-210° to 760°C (-346° to 1,400°F)	±0.6°C (±1.08°F) ± thermocouple probe accuracy	0.03°C (0.06°F)
Type K	-260° to 1,370°C (-436° to 2,498°F)	±0.7°C (±1.26°F) ± thermocouple probe accuracy	0.04°C (0.07°F)
Type T	-260° to 400°C (-436° to 752°F)	±0.6°C (±1.08°F) ± thermocouple probe accuracy	0.02°C (0.03°F)
Type E	-260° to 950°C (-436° to 1,742°F)	±0.6°C (±1.08°F) ± thermocouple probe accuracy	0.03°C at (0.05°F)
Type R	-50° to 1,550°C (-58° to 2,822°F)	±2.2°C (±3.96°F) ± thermocouple probe accuracy	0.08°C (0.15°F)
Type S	-50° to 1,720°C (-58° to 3,128°F)	±2.2°C (±3.96°F) ± thermocouple probe accuracy	0.08°C (0.15°F)
Type B	+60° to 1,820°C (1,022° to 3,308°F)	±2.5°C (±4.5°F) ± thermocouple probe accuracy	0.1°C (0.18°F)
Type N	-260° to 1,300°C (-436° to 2,372°F)	±1.0°C (±1.8°F) ± thermocouple probe accuracy	0.06°C (0.11°F)

*USB cable included with software part # BHW-PRO-CD

HOBO UX120 4-Channel Pulse Logger

Log pulse signals, events, state changes, and runtimes

The HOBO UX120 4-Channel Pulse data logger is a highly versatile, 4-channel energy data logger that combines the functionality of four separate energy loggers into one compact unit. It enables energy management professionals – from energy auditors to building commissioners – to easily track building energy consumption, equipment runtimes, and water and gas flow rates.

Supported Measurements: Pulse Signals, Event, Runtime, State, AC Current, AC Voltage, Amp Hour, Kilowatt Hours, Kilowatts, Motor On/Off, Power Factor, Volt-Amps, Watt Hours, Watts, Volt-Amp Reactive, Volt-Amp Reactive Hour (sensors sold separately)



Key Advantages:

- Simultaneously measures and records pulse signals, events, state changes, and runtimes
- Stores over 4 million measurements, enabling longer deployments with fewer site visits
- Streamlines deployment via range of start/stop options, logger status LEDs, and high-speed USB 2.0 data offload
- Works with Onset's E50B2 Power & Energy Meter to measure Power Factor, Reactive Power, Watt Hours, and more

Minimum System Requirements:



Software



USB cable*



Sensor

► For complete information and accessories, please visit: www.onsetcomp.com

Part number	UX120-017	UX120-017M
Memory	520,000 measurements	4,000,000 measurements
Sampling rate	1 second to 18 hours	
Battery life	1 year typical, user replaceable, 2 AA	
External contact Input	Electronic solid state switch closure or logic driven digital signals to 24V	
Max pulse frequency	120 Hz	
Max state, event, runtime frequency	1 Hz	
Resolution	Pulse: 1 pulse, Runtime: 1 second, State and Event: 1 state or event	
Bits	4 - 32 bits depending on pulse rate and logging interval	
Lockout time	0 to 1 second in 100 ms steps	
Operating temperature range	Logging: -40° to 70°C (-40° to 158°F); 0 to 95% RH (non-condensing)	
Dimensions	11.4 x 6.3 x 3.3 cm (4.5 x 2.5 x 1.3 inches)	
CE compliant	Yes	

*USB cable included with software part # BHW-PRO-CD

OneTemp^o
measure | control | record
1300 768 887
www.onetemp.com.au

Copyright© 2016 Onset Computer Corporation. All rights reserved. Onset, HOBO, HOBOware are registered trademarks of Onset Computer Corporation. Other products and brand names may be trademarks or registered trademarks of their respective owners. Patented technology (U.S. Patent 6,826,664) MKT1164-0301